POS.NR./ACHSEN	
H/6	1/B-C
H/6	2/A-B
H/6	4/B-C
H/6	5/A-B

Item List

Part H/6 Quantity 4

Position-No.	Profile	Material	Quantity	Length	Weight
H/6	IPE330	S235JRG2	1	7911.1	388.8
N/1005	IPE300	S235JRG2	1	724.3	30.6
N/1006	PL30*170	S235JRG2	1	677.5	27.1
N/1010	PL10*165	S235JRG2	1	250.8	3.0
N/1011	PL10*112	S235JRG2	1	158.5	0.9
N/1012	PL10*123	S235JRG2	1	175.5	1.0
				Total Weight in kg	451.4

INDICATION FOR WELDING

Thickness of the fillet weld a

All not indicated welds a=4mm!

Indication			
Specification			

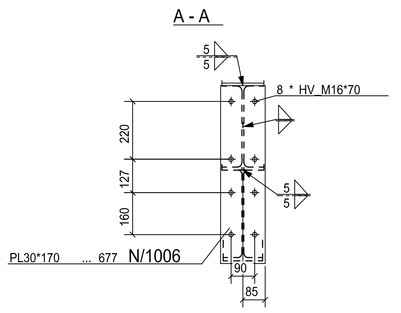

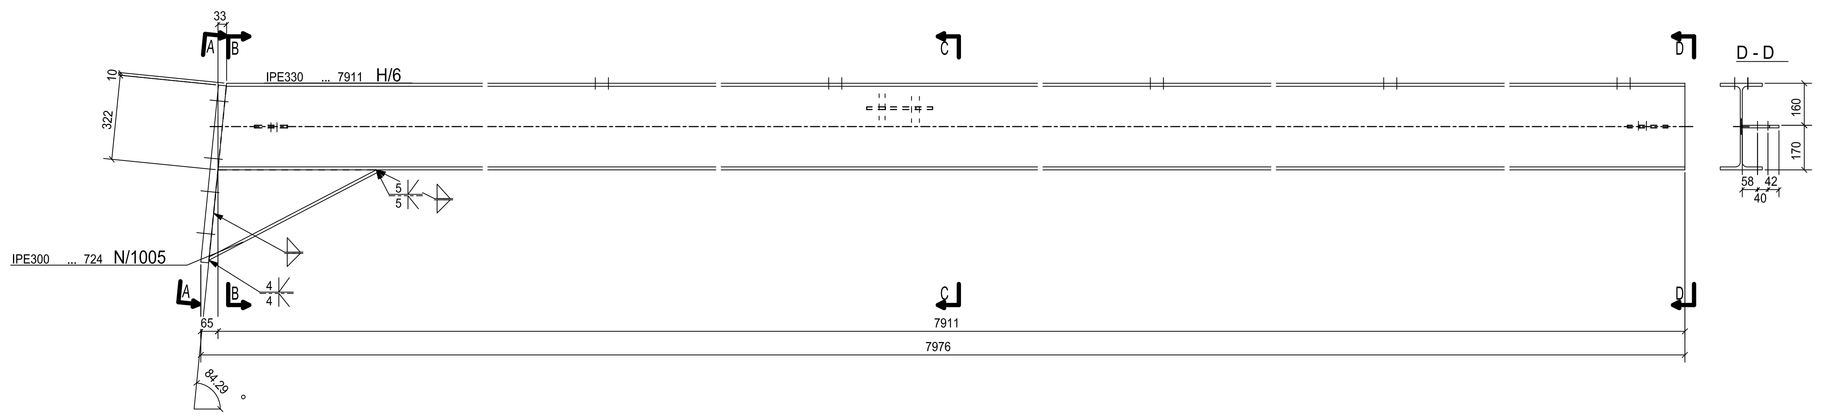

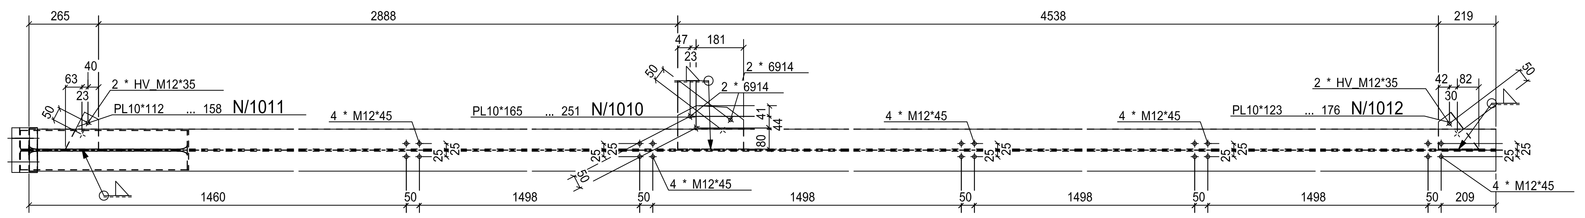

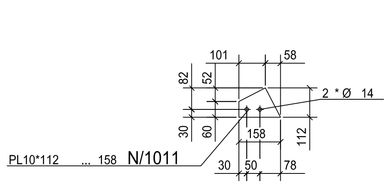

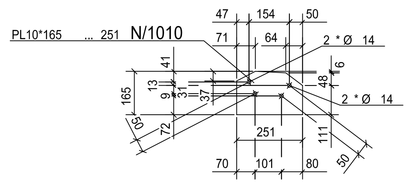

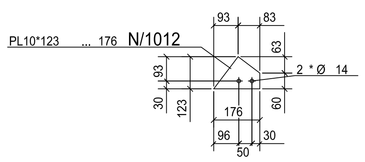



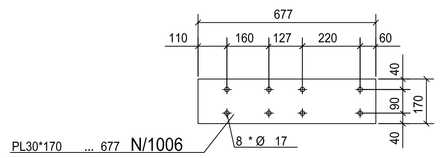





NOTE:

- All dimensions are in "mm" unless otherwise indicated.
- Elevation ±0.00 is equivalent to actual site elevation.
- Welding quality according to AWS D1.1.
- Procedure for welding:Hand-held electrode welding.
- All dimensions and information have to be checked at the building site. In case of discrepancy, the engineer must be informed before execution or consult with the designer.
- Do not scale dimensions from drawings, the contractor shall request, from the architect, necessary dimensions not shown on the drawings.
- Contractor is to confirm with architect as to where exposed welds are to be ground flush / smooth.
- Provide temporary bracing to maintain stability of steelwork during construction.

REFERENCE DRAWINGS

DRW- No.:	DESCRIPTION:

STRUCTURAL DESIGN

ATTA – Structural Engineering & Consulting Co., Ltd.

DRAWING KIND: Steel Drawing

CONSTRUCTION STAGE:

No.	REVISION				DESCRIPTION
e					
d					
c					
b					
a					
	NAME	DATE	NAME	DATE	
	PREPARED	CHANGED	CHECKED		

PLANNING STAGE

DESIGNATION: FABRIC – H6 Bracing

PROJECT: OFFICE BUILDING

PROJECT No.	ORIG. SIZE	ORIG. SCALE	DRAWING No.	REV.
XXX	A0	1:10	XXX	